
# ORECK

# SIMPLY AMAZING

USER'S GUIDE

## ORECK® IRONMAN

Powerful New Sound Suppressed Motor with Overload Protection Switch

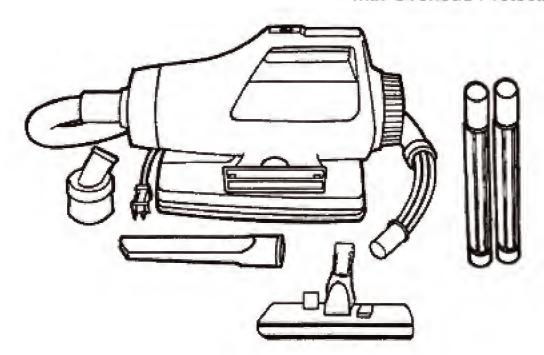

MODEL: IM90



USA: 1-800-969-3535 CANADA: 1-888-676-7325



WWW.ORECK.COM



VISIT ONE OF OUR OVER 750 STORE LOCATIONS

## IMPORTANT:

Save This Booklet.

Please read these instructions completely before using your Ironman Canister vacuum.

FOR HOUSEHOLD USE ONLY.

### IMPORTANT SAFETY INSTRUCTIONS

When using an electrical appliance, basic precautions should always be followed, including the following:

## WARNING - To reduce the risk of fire, electric shock, or injury:

#### READ ALL INSTRUCTIONS BEFORE USING THIS PORTABLE CANISTER VACUUM


- Do not leave appliance when plugged in. Unplug from outlet when not in use and before servicing.
- WARNING To reduce the risk of electric shock -Do Not Use Outdoors or On Wet Surfaces.
- Do not allow to be used as a toy. Close attention is necessary when used by or near children.
- Use only as described in this manual. Use only manufacturer's recommended attachments.
- Do not use with any damaged cord or plug. If appliance is not working as it should, has been dropped, damaged, left outdoors, or dropped into water, return it to a service center.
- Do not unplug by pulling on cord. To unplug, grasp the plug, not the cord.
- Do not pull or carry by cord, use cord as handle, close a door on cord, or pull cord around sharp edges or comers. Do not run appliance over cord, keep cord away from heated surfaces.
- 8. Do not handle plug or appliance with wet hands.
- Do not put any object into opening. Do not use with any opening blocked; keep free of dust, lint, heir, and enything that may reduce air flow.


- Keep hair, loose clothing, fingers and all parts of body away from opening and moving parts.
- 11. Avoid operating this appliance with bare feet.
- Do not pick up anything that is burning or smoking, such as cigarettes, matches, or hot ashes.
- Make sure articles of clothing and all other objects are clear of path of power run tool while in operation.
- Do not use without dust bag and/or filters in place.
- 15. Turn off all controls before unplugging.
- Make sure appliance is turned off before connecting or disconnecting hose.
- 17. Use extra care when cleaning on stairs.
- Do not use to pick up flammable or combustible liquids such as gasoline or use in areas where they may be present.
- Any service done to this appliance should be done by qualified technician.
- 20. Keep this manual for future reference.

### SAVE THESE INSTRUCTIONS

#### UNPACKING AND OPERATION

- Unpack the vacuum cleaner from the carton, identify the parts shown on cover of this care and use folder.
- To attach the flexible hose, simply insert it into inlet of cleaner. To remove hose, press button firmly on coupling and pull out. (Fig. 1)
- Attach the wands to the end of the hose. Attach the floor tool to end of wand. (Fig. 2) Use a slight twisting motion for any accessory connection to insure proper seal.
- Attach accessories to the end hose. Simply push firmly onto end using a slight twisting motion to insure proper seal.






#### **OPERATING INSTRUCTIONS**


- Connect to a properly polarized outlet only. See POLARIZATION INSTRUCTIONS.
- Your ORECK cleaner has two speed settings LO and HI. Push the power switch forward on notch for the LO setting for gentle cleaning of drapes and shears. Push the power switch one more notch forward to the HI setting for maximum cleaning power. Pull the switch all the way back to turn the unit OFF.
- 3. Do not operate without the dust bag and foam filter in place.

# MAINTENANCE AND STORAGE CAUTION: ALWAYS UNPLUG POWER CORD FROM ELECTRICAL OUTLET BEFORE PERFORMING MAINTENANCE,

- To insure maximum pick-up power, change bag often.
- Check foam filter each time bag is changed. It is located at the bottom of the dust bag compartment. When dirty, the filter should be rinsed in water and dried completely before use.
- 3. Lubrication is not needed. The motor and bearings are self lubricating.
- The pedestal base contains special receptacles for convenient tool and cord storage. (Fig. 3) For cord storage, set unit on end and wrap cord around pedestal. Secure cord by using clip on side of plug. (Fig. 4)
- To store the unit use either of the two holes provided on the bottom of the base and secure on a wall or closet hook. Make certain the wall hook is securely anchored to support the 8 lbs. weight of the unit. (Fig. 5)







#### **AUTOMATIC THERMAL PROTECTION DEVICE**

For your safety and protection as well as the protection of the vacuum cleaner, the electric motor of this appliance is equipped with an automatic thermal protection device. The electric motor may automatically shut off if any one of the following occurs: Abnormal usage, clogging or blocking of any air passage, or a full dust bag.

#### CAUTION: ALWAYS UNPLUG CORD FROM ELECTRICAL OUTLET BEFORE PERFORMING MAINTENANCE.

If the thermal protection device shuts off the motor, unplug the vacuum cleaner and check the following.

- Make sure the hose is not clogged with dirt or other objects.
- 2. Make sure the dust bag is not full.
- Make sure the foam filter located at the bottom of the dust bag compartment is not blocked or clogged.

It may take up to sixty minutes for the thermal protector to reset depending on the temperature of the motor, room temperature and other factors. When the motor cools sufficiently the thermal protector will automatically reset and the vacuum cleaner will become operational again.

#### POLARIZATION INSTRUCTIONS

To reduce the risk of electric shock, this appliance has a polarized plug (one blade is wider than the other). This plug will fit in a polarized outlet only one way. If the plug does not fit fully in the outlet, reverse the plug. If it still does not fit, contact a qualified electrician to install the proper outlet. Do not change the plug in any way.

#### PARTS LIST 21 ITEM ITEM PART NO. DESCRIPTION PART NO. DESCRIPTION NO. NO 61640E 62731D Screw, No. 6x3/4" Lg. (2) Housing, L.H. 17. 1. 2. 62730D Housing, R.H. 18. 82764A Glamour Cap 62760 3. 62735N Base Plate 19 Screen, Motor 90034F Inlet Assembly 20. 82784R Dolly 4. Exhaust Griff \$2251A Wheel, Plastic (2) 5. 62734F 21. Cord Retainer A2785 Axle, Dolly Ġ. 82736F 22 Cord, 25" Lg. T 61576T 23 63962 Caster, Swivel 80058B Switch, 2 Speed 24. 62074G Crevice Tool В. Wire Connector (3) 25. 60815P **Dusting Brush** ġ. 81199 28. 63957 Flexible Hose (IM-90) 91082A Motor Kit (Includes Nos. 11, 12) 27. 62759E Wand, 1 1/4" (2) Motor Assembly Bare Floor and Carpet Tool 11. 62007 28 82765G 82008 Front Seal 29. 80452 Upholstery Tool willrush 12. 30. 63529 Screw, No. 3x3/4" (4)

31.

32.

62260

62941

62742L

62743L

ORECK MANUFACTURING COMPANY: (Orack Manufacturing Company gives you the following limited seamonly for this product only if it was originally purchased for residential use, not resale from Dreck or an Grack Authorized Retail Dealer.)

Disposable Paper Filter Bag

Screw, No. 8x1 1/2" Lg. (4):

Foam Filter

Seal, Vacuum (2)

13.

14.

15.

18.

62795

62741

61640F

61963G

Oracle will repair or replace, tree of charge, to the original purchases, any part that is found defective in material or workmanship within times (3) years of the date of purchase. Any commercial use of this product will wold the limited estimated estimately estimated estimated estimated estimated, instance, disposable begs and other parts subject to normal sease unless they are defective in material or workmanship.

This limited converty does not apply to any part subjected to eccident, abuse, commercial use, aftersion, mistes, damage caused by sot of God, the use of voltages other than indicated on the serial number displayed on this product or service of this product by other than Dreck or a participating Factory Authorized Service Center.

this product or aim/os of this product by other than Dreck or a participating Factory Authorized Service Center.

Dreck does not authorize any person or representative to assume or grant any other winnersy obligation with the sale of this product. Creck's invited warranty is valid only if you retain proof of purchase from Creck or an Orack Authorized Retail Dealer to this product. If you prothese this product from any other source, your purchase it "45 15," which means Creck grants you no warranty, and that you, not Creck, assume the entire last of the quality and performence of this product, including the entire cost of any recessary saleiding or repairs of any defects. Creck's liability for damages to you for any costs whethouses steing out of this statement of invited warranty shall be limited to the amount paid for this product at the time of original purchase, and Creck shall not be liable for any direct, indirect, corresponding in inclinated damages using out of the late or insidely to use this product.

Some states do not allow the auctivation or limitation of incidental or consequential damages, so the above imitation or auctivation may not apply to you.

ALL EXPRESS AND MAJED WARRANTIES FOR THIS PRODUCT, INCLUDING MAJERD WARRANTY PERFOD, CHARGESTY AND ATMESS FOR A MATICULAR PURPOSE, ARE LIMITED IN DURATION TO THE WARRANTY PERFOD, AND NO VINANTHIES, WHETHER EXPRESS OR MAYLED, WILL APPLY AFTER THIS PERFOD.

Some states do not allow the limitations on the duration of implied warranties, so the above limitation may not apply to you.

This warranty gives you specific legal rights, and you may also have other rights which very from state to itself.

# ORECK®

Screw, No. 8x7/16" (2)

Sleeve, Fiberglass

Decal, R.H.

Decal, L.H.

#### ORECK CORPORATION

100 Plantation Road New Orleans, Louisiana 70123

1-800-989-3535

www.oreck.com

PN 62749R